

Volumetric digital control dispenser

MEASURING MASTER

MPP-5

Head S

Ultra-precision constant
volume dispensing of
“liquid material
with varying viscosity.”

Set dispensing volume to suit capacity and density

Our unique plunger technology empowers superior durability

New

Includes an overload detection feature

***Improved pump capacity and enhanced liquid
material feed mechanism***

***The error log feature contributes to improved
production control***



Dispensing applications



Potting sensor components






*Capable of adhesive application
on optical components*



*Capable of gluing magnets
in an IPM motor*

Quick reference to the MPP-5 Series features

MPP-5-S					MPP-5-M			
								
Pump capacity (mL)								
NEW 0.031	NEW 0.056	0.127	0.226	0.508	NEW 1.200	NEW 3.200	5.100	7.300
The way of liquid material delivery								
<ul style="list-style-type: none">● Musashi syringe (10 to 70mL)● Tank● Sealant cartridge					<ul style="list-style-type: none">● Barrel cartridge (170 to 340 mL)● Sealant cartridge● Tank			
Common controller MPP-5-CTR 					<ul style="list-style-type: none">■ Error log■ No return-home action required			



Two-component mixing configuration **DUAL MPP-5**



Specifications

Item name	Volumetric digital control dispenser MEASURING MASTER				
Model	MPP-5-H-S				
Dispensing system	Volumetric type & plunger type				
Control system	Microcomputer digital control system				
Pump unit models	MPP-5-P-S-PU-031-1, MPP-5-P-S-PU-031B1-1	MPP-5-P-S-PU-056-1, MPP-5-P-S-PU-056B1-1	MPP-5-P-S-PU-127B1-1	MPP-5-P-S-PU-226B1-1	MPP-5-P-S-PU-508B1-1
Dispensing amount setting range	0.00001 to 0.03100 mL	0.00001 to 0.05600 mL	0.00001 to 0.12700 mL	0.00001 to 0.22600 mL	0.00001 to 0.50800 mL
The setting range of liquid delivery pressure	0.001 to 0.500 MPa				
Dispensing time setting range	0.01 to 99.99 s				
Dispensing rate setting range	1 to 24 mm/seconds (varies depending on the head size)				
Main functions	Suckback, quick washing, air bubble removal, remaining amount warning, Japanese/English UI selection, unit of measure selection (mL/μL/g), density conversion, error log, α adjustment, pressure mode selection				
Channel number	400 CH				
D-Sub for external input/output signals	Connector	D-Sub 25-pin (socket)			
	Input	Photocoupler input, DC24V, 5mA Dispensing, filling, setup, channel selection, ENABLE signal			
	Output	Photocoupler open collector output, DC24V, 10mA or lower Dispensing/dispensing complete, fill request, pump running, error present, remaining amount warning, power on, maintenance position, air bubble removal position			
Source pressure	0.400 to 0.800 MPa				
Rated power and frequency	AC 100 ~240 V, 50/60 Hz				
Allowable rated voltage fluctuation range	Within ± 10% of the nominal voltage				
Operating environment (indoor only)	Temperature: 15 to 35°C , humidity: 40% to 75% (no condensation allowed), altitude: Not greater than 2,000 m				
Storage environment	Temperature: 0 to 55%, humidity: 40% to 80% (no condensation allowed)				
External dimensions (excluding protrusions)	Head: W64.5 × D86.5 × H349.5 (mm) Controller: W300 × D250 × H110.8 (mm)				
Weight	Head: 0.94 kg (not including the liquid material and the liquid material container) Controller: 4.6 kg				
Liquid material feed container	Musashi syringe (10 to 70 mL), tank, sealant cartridge, barrel cartridge (170 to 340 mL)				
Conformity standards	EU RoHS2, CE-marking (Low Voltage Directive, EMC Directive)				
Power consumption	75 W				

External dimensions

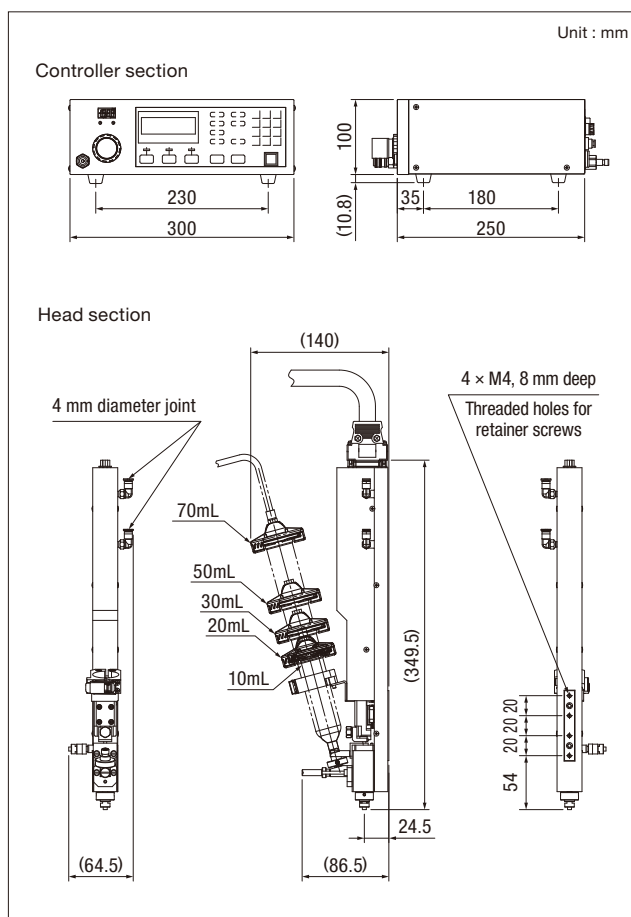

*These specifications are subject to change without any notice.
*The copyright of this catalog belongs to our company. Reproduction and distribution of the pictures, illustrations and any other information in this catalog to any other media without prior written permission are strictly prohibited; doing so will result in copyright infringement.

MUSASHI ENGINEERING, INC. (headquarters) is certified and registered according to the ISO 9001 Quality Management System and the ISO 14001 Environmental Management System.



World Leading Dispenser
MUSASHI ENGINEERING, INC.

BRANCH JAPAN » TOKYO, OSAKA, NAGOYA, SENDAI, FUKUOKA, SAITAMA, NAGANO, EAST-KANTO, AKITA, KANAZAWA
GERMANY, SINGAPORE, THAILAND, INDONESIA, KOREA, TAIWAN
CHINA » HONG KONG, SHANGHAI, SHENZHEN, TIANJIN, SUZHOU

